


BARRIER WE-10290

It can cover the needs of access control where speed is required at the entrance of vehicles. Recommended for low height ceiling.

It can work independently or as part of the IPS Parking system.

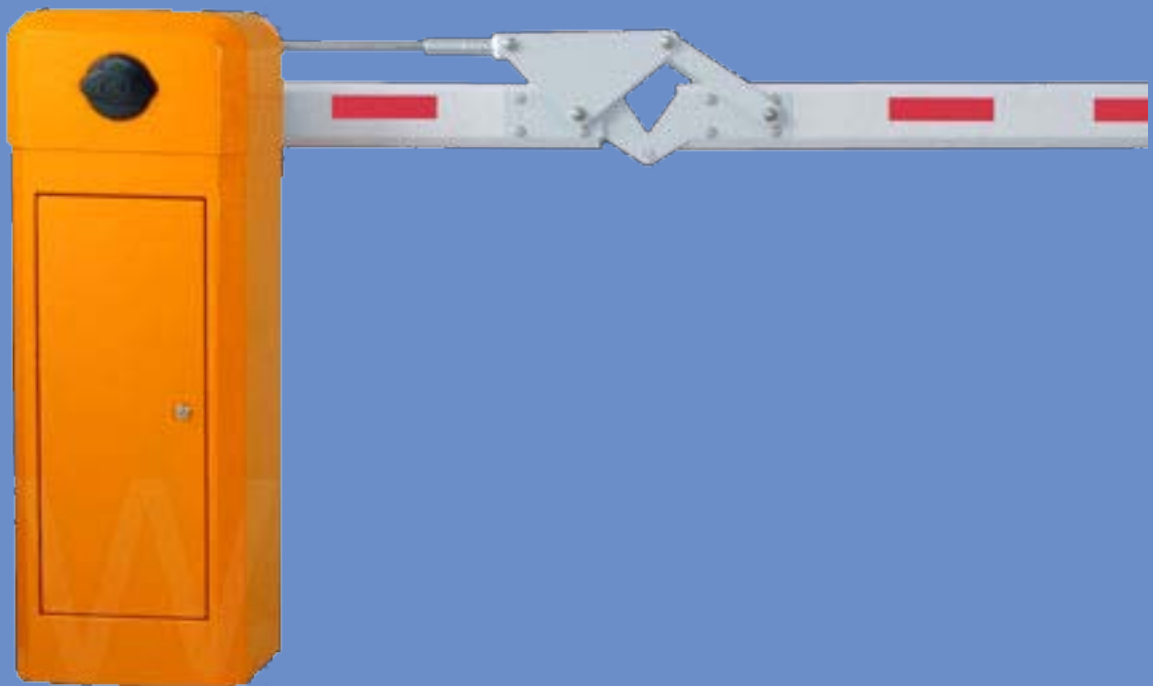

IPS Parking & Automation Systems

POLYKASTRO - KILKIS

+30 2343110666

www.carparking.gr

Functionality - specifications

- Metal construction 3mm galvanize
- Heating protection of the electrical motor
- Auto power off in case of accident
- Auto reversing when meets an obstacle.
- Manual release.
- Supports photocells
- Support vehicle loop detector
- Wireless remote control (optional)
- Traffic light interface
- RS485 port (optional)

Technical specifications

- Running time 1.5 sec
- Boom type: 90° folding arm
- Power 230 V AC@ 50 Hz
- Consumption (Max) 120W
- Operate temperature -10°C to + 45°C
- Height: 40X40X100
- Boom weight 3 kgr
- Weight: 35 Kgr